










www.beghelli.com

BEGHELLI S.p.A. - Via Mozzeghine 13/15 - località Monteveglio 40053 Valsamoggia (BO) - Tel. +39 051 9660411 - Fax +39 051 9660444 - N° Verde 800 626626





004.902.394 D

EN 1838

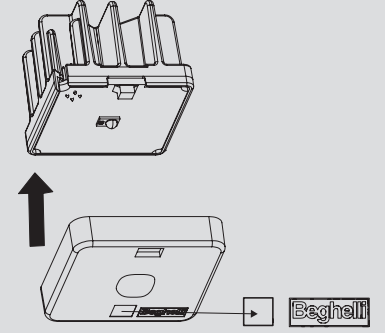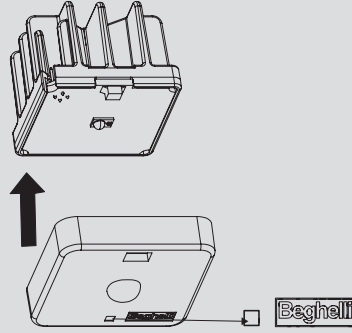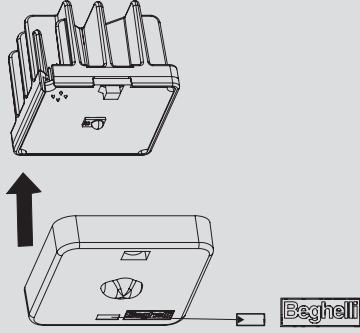

C

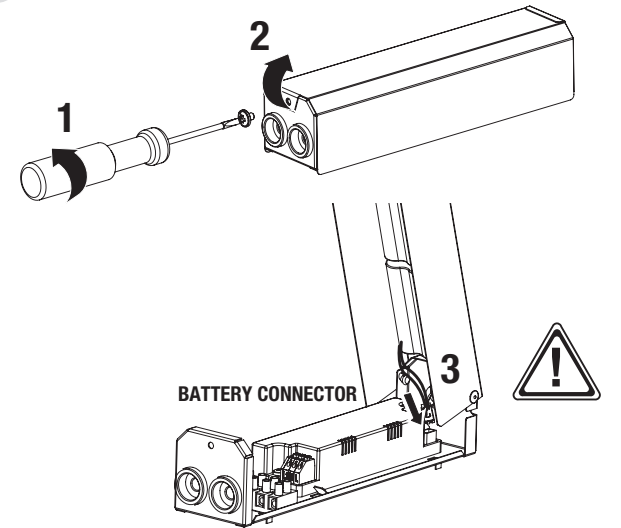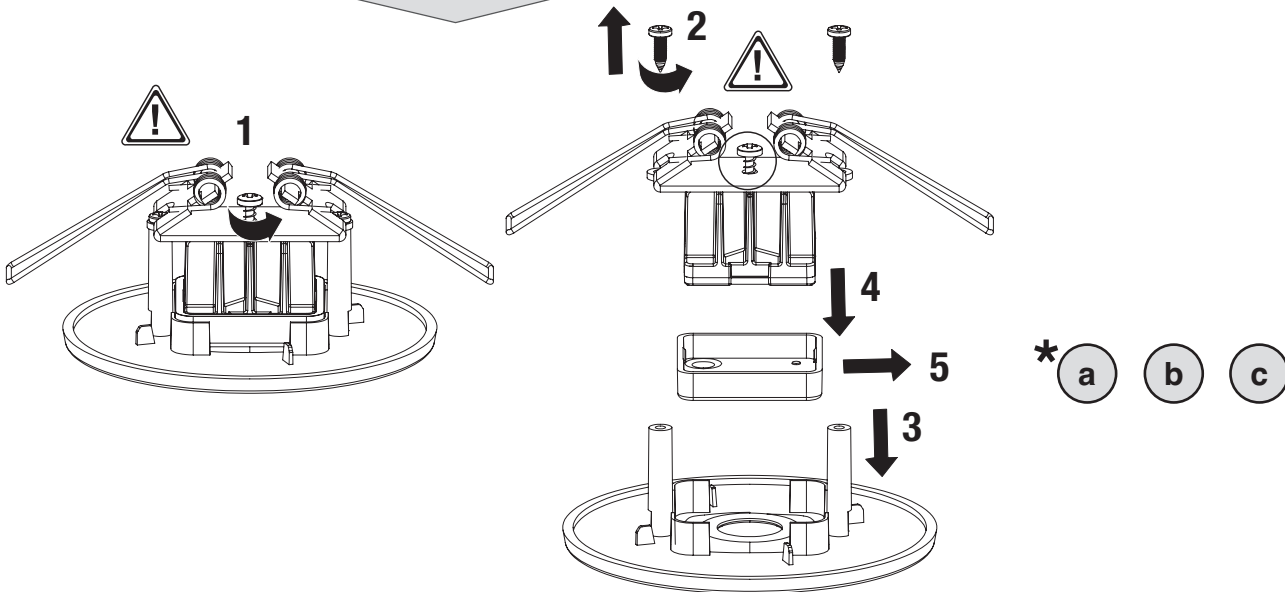

E



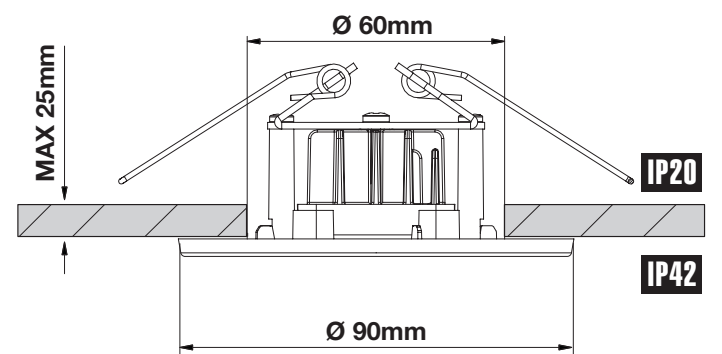


Diagram illustrating the connection of a 250mm x 5mm x 0.5mm² battery cable to the back of the LED module. The cable is connected to the battery connector on the back of the module. The diagram also shows the internal wiring of the module, including the LED array, control board, and power input terminals. A warning symbol is present near the battery connector.

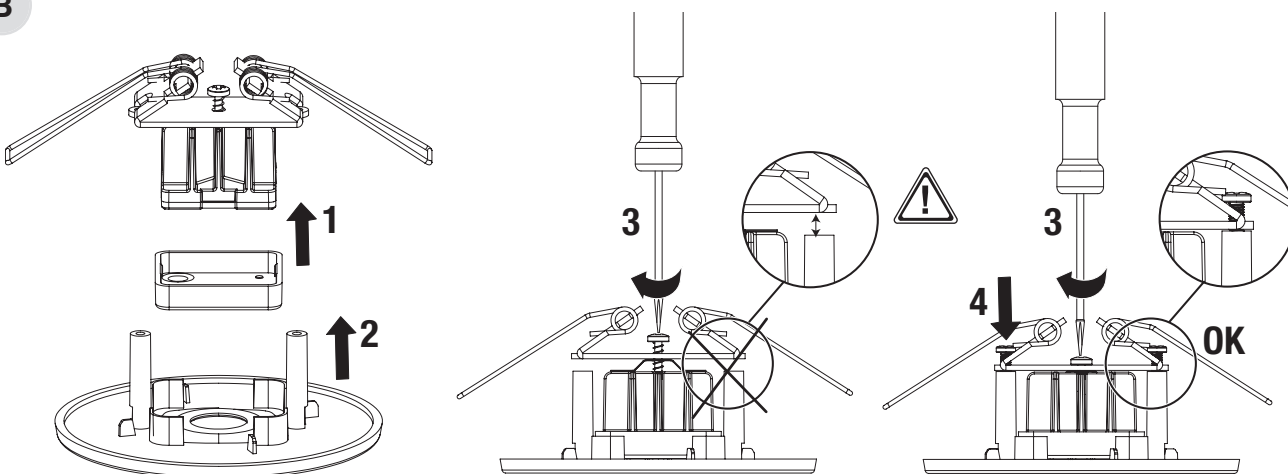

	230V 50Hz	COS φ	LED	 *	
4395 (SE)	21mA	0,57	1 LED	1h 1,5h 2h 3h 8h	LiFe 6.4V 1.5Ah
4394 (SE/SA)	32mA	0,6	1 LED		LiFe 6.4V 1.5Ah
4396 (SE/SA)	32mA	0,6	1 LED		LiFe 6.4V 0.6Ah

* Per la gestione dell'autonomia fare riferimento alla tabella
For autonomy management refer to the table

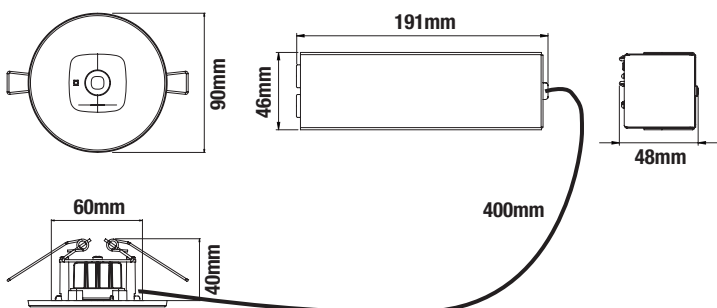